

PEWOPLASTGRIP Ø 312-640 mm / PN6 (EPDM)

Order number: 140-PG6A4E312-325



Diameter range: > 172 mm
Pipe materials: Plastic pipes - Plastic pipes
 Drinking water / wastewater / air / compressed air (oil-free) / solids
Flowing medium: -30 °C up to 125 °C EPDM HT (peroxyd)
Pressure levels: PN 6
High tension-proof / Not tension-proof: High tension-proof

Application temperature: -30°C bis +80°C
Maximum diameter difference: bis 3 mm

Tender text:
 PEWOPLASTGRIP PN 6 TENSION-PROOF with EPDM Sealing
 -30°C up to +80°C in A4 (316/1.4571) Quality Ø min./max.
 312-325 mm Width 140 mm 1 Closure Country of origin: NL
 TARIC: 73072980 weight: 8 kg

OD Ø min. / max. 312 / 325 mm

≈ B 140 mm

Cmax 40 mm


≈ d 363 mm

≈ H 389 mm

M M16

Gewicht 8 kg

≈ Volumen 28 dm³

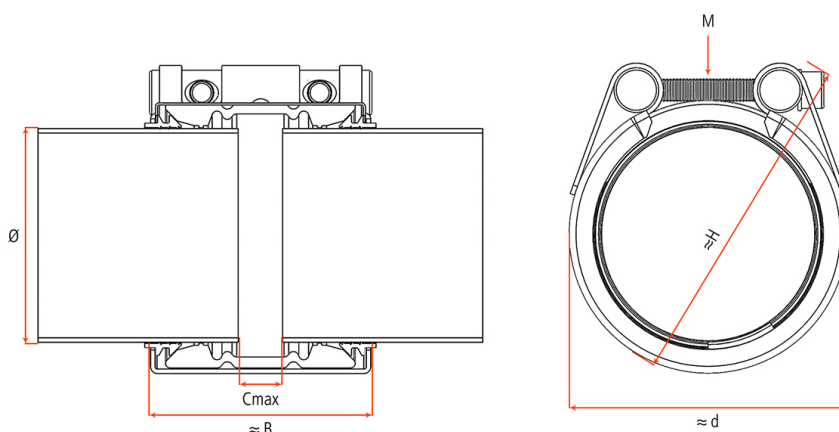

Important information:

- Follow the installation and disassembly instructions.
- PN = Working pressure with consideration of the application loads for industrial applications. In case of shipbuilding applications, PN is one PN class below, e.g. PN 25 Industry = PN 16 Shipbuilding.
- PN classes = PN 2.5; PN 6; PN 10; PN 16; PN 25
- Test pressure = PN x 1.5
- The pressure data is given under the precondition that radially rigid steel pipes with a minimum wall thickness are used under static load.
- Use the Technical Manual for other pipe materials.
- Band inserts are necessary for special applications.
- Support sleeves must be used for thermoplastic plastic pipes (PE/PP/PB/PVC/ABS...).