

PEWOPLASTGRIP Ø 39-363 mm / PN16 (EPDM)

Order number: PGS16A4E39-43



Diameter range: ≤ 172 mm, > 172 mm
Pipe materials: Plastic pipes - Plastic pipes
 Drinking water / wastewater / air / compressed air (oil-free) / solids
Flowing medium: -30 °C up to 125 °C EPDM HT (peroxyd)
Pressure levels: PN 16
High tension-proof / Not tension-proof: High tension-proof

Application temperature: -30°C bis +125°C
Maximum diameter difference: bis 1 mm

Tender text:
 PEWOPLASTGRIP PN 16 TENSION-PROOF with EPDM Sealing
 -30°C up to +125°C in A4 (316/1.4571) Quality Ø min./max. 39-43 mm Width 60 mm 1 Closure Country of origin: NL TARIC: 73072980 weight: 0,6 kg

OD Ø min. / max. 39 / 43 mm

≈ B 60 mm

Cmax 15 mm


≈ d 66 mm

≈ H 104 mm

M M8

Gewicht 0.6 kg

≈ Volumen 1 dm³

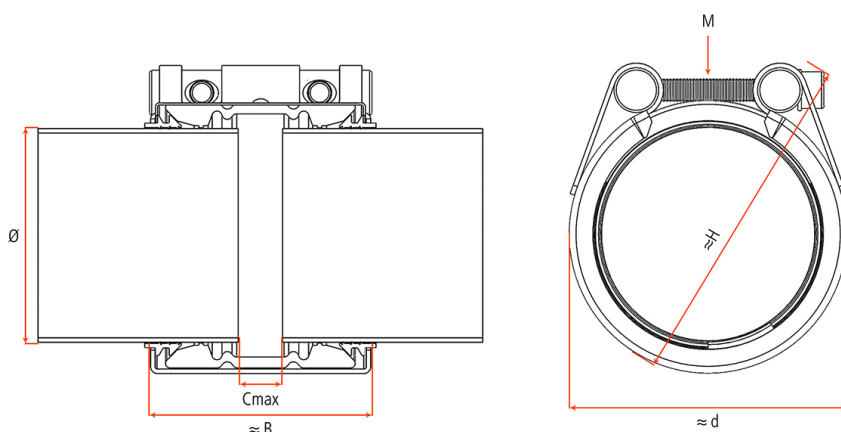

Important information:

- Follow the installation and disassembly instructions.
- PN = Working pressure with consideration of the application loads for industrial applications. In case of shipbuilding applications, PN is one PN class below, e.g. PN 25 Industry = PN 16 Shipbuilding.
- PN classes = PN 2.5; PN 6; PN 10; PN 16; PN 25
- Test pressure = PN x 1.5
- The pressure data is given under the precondition that radially rigid steel pipes with a minimum wall thickness are used under static load.
- Use the Technical Manual for other pipe materials.
- Band inserts are necessary for special applications.
- Support sleeves must be used for thermoplastic plastic pipes (PE/PP/PB/PVC/ABS...).