

PEWOREP ø 36-930 mm / PN25 (EPDM) A4

Order number: RS16A4E36-39



Housing material:	Closure, Housing Material A4 (1.4571 / 1.4404)
Damage length:	Damage length up to max. 400 mm all damages
Diameter range:	<= 172 mm, > 172 mm
Pipe materials:	All pipe materials
Flowing medium:	Drinking water / wastewater / air / compressed air (oil-free) / solids -30 °C up to 125 °C EPDM HT (peroxyd)
Pressure levels:	PN 25
High tension-proof / Not tension-proof:	Not tension-proof

Application temperature: -30°C bis +125°C

Maximum diameter difference: bis 1 mm

Tender text:

PEWOREP PN 25 NOT TENSION-PROOF with EPDM Sealing
-30°C up to +125°C in A4 (316/1.4571) Quality Ø min./max. 36-39 mm Width 60 mm 1 Closure / Country of origin: NL TARIC: 73072980 weight: 0,4 kg

OD Ø min. / max. 36 / 39 mm

≈ B 60 mm

Cmax 15 mm


≈ d 66 mm

≈ H 104 mm

M M8

Gewicht 0.4 kg

≈ Volumen 1 dm³

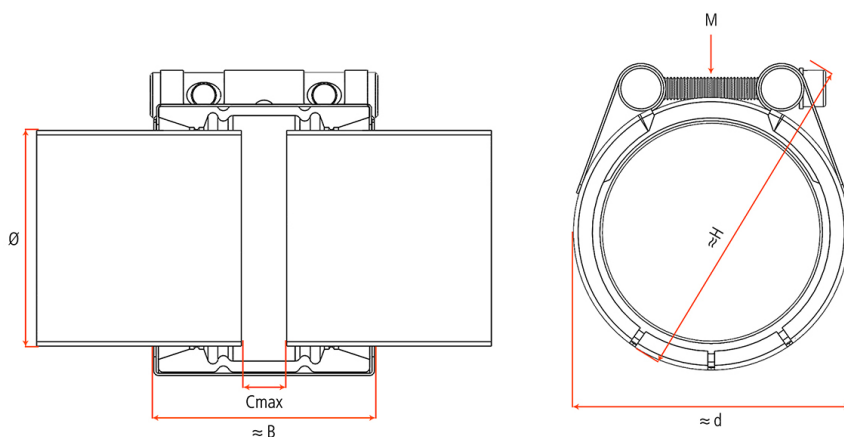

Important information:

- Follow the installation and disassembly instructions.
- PN = Working pressure with consideration of the application loads for industrial applications. In case of shipbuilding applications, PN is one PN class below, e.g. PN 25 Industry = PN 16 Shipbuilding.
- PN classes = PN 2.5; PN 6; PN 10; PN 16; PN 25
- Test pressure = PN x 1.5
- The pressure data is given under the precondition that radially rigid steel pipes with a minimum wall thickness are used under static load.
- Use the Technical Manual for other pipe materials.
- Band inserts are necessary for special applications.
- Support sleeves must be used for thermoplastic plastic pipes (PE/PP/PB/PVC/ABS...).

PEWOBAR GmbH | Barloer Straße 34 | D-46414 Rhede | Fon: +49 (0) 2872 3075930 | www.pewobar.de

Geschäftsführer: Dipl.-Ing. Wolfgang Barbett | Amtsgericht Coesfeld HRB 9285 | Ust.ID Nr.: De 237757754 | eMail: wb@pewobar.de
Bankverbindung: Volksbank Rhede | Konto: 53063400 | BLZ 428 618 14 | IBAN: DE 60 428 618 140 053 063 400 | BIC: GENODEM1RHD