

gereinigt und einzeln verpackt GS16A4E39-43

Order number: EOS-Clean-GS16A4E39-43



Application temperature: -30°C bis +125°C

Maximum diameter difference: bis 1 mm

Tender text:

gereinigte und einzeln in Kunststoffbeutel verpackte Rohrkupplung
PEWOG RIP PN 25 ZUGFEST mit EPDM Dichtung -30°C bis
+125°C in A4 (316/1.4571) Qualität Ø min./max. 39-43 mm Breite
60 mm 1 Verschluss

OD Ø min. / max. 39 / 43 mm

≈ B 60 mm


Cmax 15 mm

≈ d 66 mm

≈ H 104 mm

M M8

≈ Volumen 1 dm³

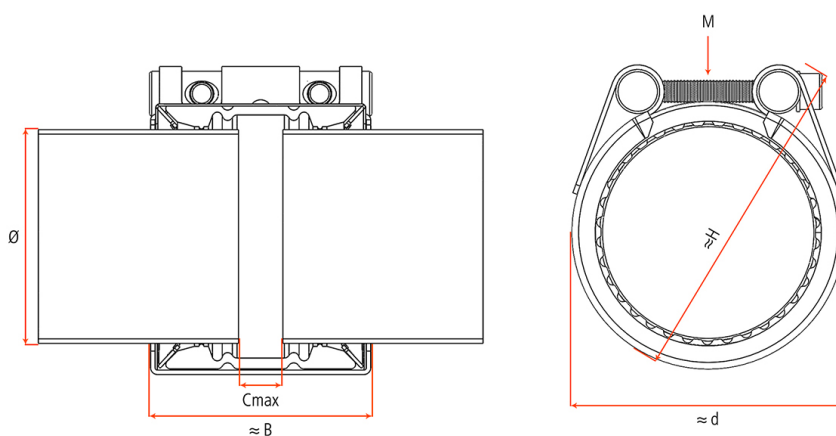

Important information:

- Follow the installation and disassembly instructions.
- PN = Working pressure with consideration of the application loads for industrial applications. In case of shipbuilding applications, PN is one PN class below, e.g. PN 25 Industry = PN 16 Shipbuilding.
- PN classes = PN 2.5; PN 6; PN 10; PN 16; PN 25
- Test pressure = PN x 1.5
- The pressure data is given under the precondition that radially rigid steel pipes with a minimum wall thickness are used under static load.
- Use the Technical Manual for other pipe materials.
- Band inserts are necessary for special applications.
- Support sleeves must be used for thermoplastic plastic pipes (PE/PP/PB/PVC/ABS...).