


PEWO-T-CLAMP-THREAD ø 48-488 mm / PN16 (EPDM) A4

Order number: 250H10T-0.50-16A4E48-55

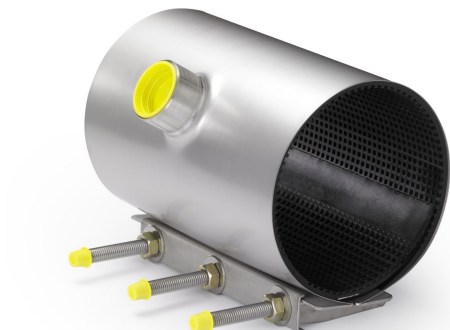

Connection: Internal or external thread
Flowing medium: Drinking water / wastewater / air / compressed air (oil-free) / solids -30 °C bis +60 °C EPDM
Housing material: Closure, Housing Material A4 (1.4571 / 1.4404)

Application temperature: -30°C bis +60°C

Tender text:

PEWOTAP one-piece Tapping clamp with two locking screws per closure, pressure range: PN 16 width: 250 mm Ø min./max.: 48-55 Stainless Steel Quality: Closure, Housing Material A4 (1.4571) Connection piece with 1/2" Internal thread Waffle structure seal EPDM sulfur cured temperature range: -30°C up to +60°C

OD Ø min. / max. 48-55 mm

≈ B 250 mm

Cmax 10 mm

M M12