


PEWO-T-CLAMP-THREAD ø 48-488 mm / PN16 (NBR) A4

Order number: 250H10T-0.50-16A4N48-55

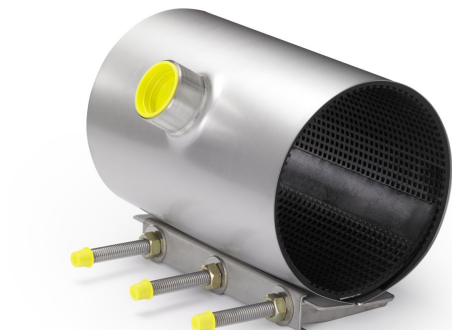

Connection: Internal or external thread
Flowing medium: Water / flammable gases / compressed air / oil / fuel and other hydrocarbons -20 °C bis +80 °C NBR
Housing material: Closure, Housing Material A4 (1.4571 / 1.4404)

Application temperature: -20°C bis +70°C

Tender text:
 PEWOTAP one-piece Tapping clamp with two locking screws per closure, pressure range: PN 16 width: 250 mm Ø min./max.: 48-55 Stainless Steel Quality: Closure, Housing Material A4 (1.4571) Connection piece with 1/2" Internal thread Waffle structure seal NBR sulfur cured temperature range: -20°C up to +70°C

OD Ø min. / max. 48-55 mm

≈ B 250 mm

Cmax 10 mm

M M12