


PEWOX Ø 43-770 mm / PN 24 / 16 (EPDM) A4

Order number: 140-2POX24A4E43-60

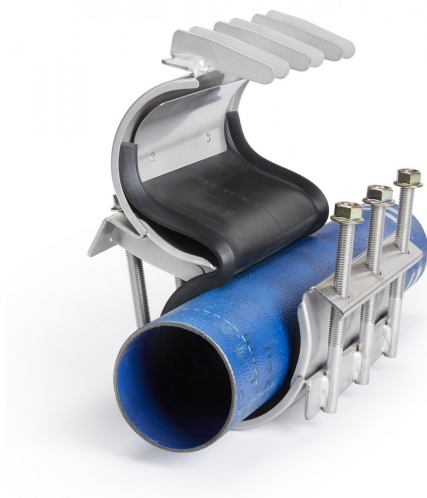

High tension-proof / Not tension-proof:	Not tension-proof
Diameter range:	<= 172 mm, > 172 mm
Pipe materials:	All pipe materials
Pressure levels:	PN 24 / 16 / 12
Flowing medium:	Drinking water / wastewater / air / compressed air (oil-free) / solids -30 °C bis +60 °C EPDM
Damage length:	Damage length up to max. 240 mm all types of damage
Housing material:	Closure, Housing Material A4 (1.4571 / 1.4404)

Application temperature: -30°C bis +60°C

Maximum diameter difference: bis 8 mm

Tender text:

PEWOX two-piece Repair clamp with 4 screw plug, pressure range: PN 24 width: 140 mm damage length: max. 100 mm Ø min./max.: 43-60 mm Ø difference max: 8 mm Steel Quality: Closure, Housing Material A4 (1.4571 / 1.4404 / 316Ti / 316 L) dynamic seal EPDM sulfur cured temperature range: -30°C bis +60°C Country of Origin: EU / TARIC: 73072980 weight:

OD Ø min. / max. 43 / 60 mm

≈ B 140 mm

Cmax 100 mm

M M12

Important information:

- Follow the installation and disassembly instructions.
- PN = Working pressure with consideration of the application loads for industrial applications. In case of shipbuilding applications, PN is one PN class below, e.g. PN 25 Industry = PN 16 Shipbuilding.
- PN classes = PN 2.5; PN 6; PN 10; PN 16; PN 25
- Test pressure = PN x 1.5
- The pressure data is given under the precondition that radially rigid steel pipes with a minimum wall thickness are used under static load.
- Use the Technical Manual for other pipe materials.
- Band inserts are necessary for special applications.
- Support sleeves must be used for thermoplastic plastic pipes (PE/PP/PB/PVC/ABS...).