

PEWOFLEX ø 277-1471 mm / PN10 (FKM)

Order number: 138-F6A4F277-290




Diameter range:	> 172 mm
Pipe materials:	Metal pipes - Metal pipes, Plastic pipes - Plastic pipes, Metal pipes - Plastic pipes, All pipe materials
Flowing medium:	Säuren / Öl / Kraftstoff und andere Kohlenwasserstoffe -20 °C bis +200°C FKM
Pressure levels:	PN 10
High tension-proof / Not tension-proof:	Not tension-proof

Application temperature: -20°C bis +200°C
Maximum diameter difference: bis 3 mm

Tender text:
 PEWOFLEX PN 10 NOT TENSION-PROOF with FKM Sealing
 -20°C up to +200°C in A4 (316/1.4571) Quality Ø min./max.
 277-290 mm Width 138 mm 1 Closure Country of origin: NL
 TARIC: 73072980 weight: 5 kg

OD Ø min. / max.	277 / 290 mm
≈ B	138 mm
Cmax	40 mm
≈ d	332 mm
≈ H	360 mm
M	M12
Gewicht	5 kg
≈ Volumen	24 dm ³

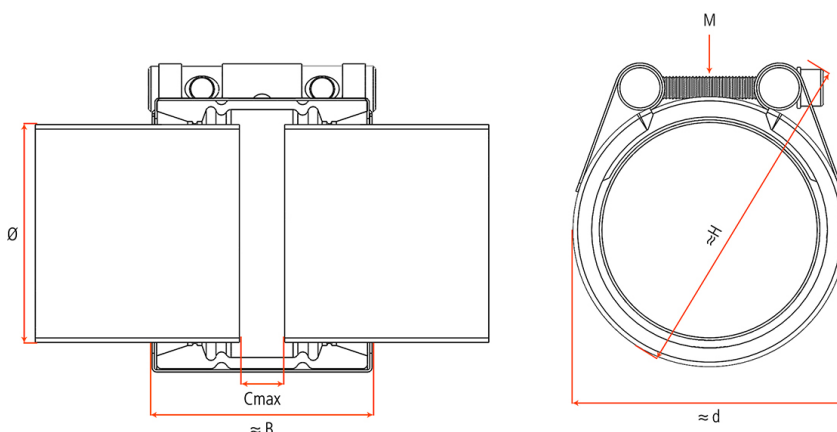

Important information:

- Follow the installation and disassembly instructions.
- PN = Working pressure with consideration of the application loads for industrial applications. In case of shipbuilding applications, PN is one PN class below, e.g. PN 25 Industry = PN 16 Shipbuilding.
- PN classes = PN 2.5; PN 6; PN 10; PN 16; PN 25
- Test pressure = PN x 1.5
- The pressure data is given under the precondition that radially rigid steel pipes with a minimum wall thickness are used under static load.
- Use the Technical Manual for other pipe materials.
- Band inserts are necessary for special applications.
- Support sleeves must be used for thermoplastic plastic pipes (PE/PP/PB/PVC/ABS...).