

PEWOREP ø 756-2090 mm / PN6 (EPDM)

Order number: 138-2R2A4E756-782



Diameter range:	> 172 mm
Pipe materials:	Metal pipes - Metal pipes, Plastic pipes - Plastic pipes, Metal pipes - Plastic pipes, All pipe materials
Flowing medium:	Drinking water / wastewater / air / compressed air (oil-free) / solids -30 °C up to 125 °C EPDM HT (peroxyd)
Pressure levels:	PN 6
High tension-proof / Not tension-proof:	Not tension-proof

Application temperature: -30°C bis +80°C

Maximum diameter difference: bis 3 mm


Tender text:

PEWOREP PN 6 NOT TENSION-PROOF with EPDM Sealing
-30°C up to +80°C in A4 (316/1.4571) Quality Ø min./max.

756-782 mm Width 138 mm 2 Closure Country of origin: NL

TARIC: 73072980 weight: 10 kg

OD Ø min. / max.	756 / 782 mm
≈ B	138 mm
Cmax	40 mm
≈ d	824 mm
≈ H	852 mm
M	M12
Gewicht	10 kg
≈ Volumen	127 dm ³

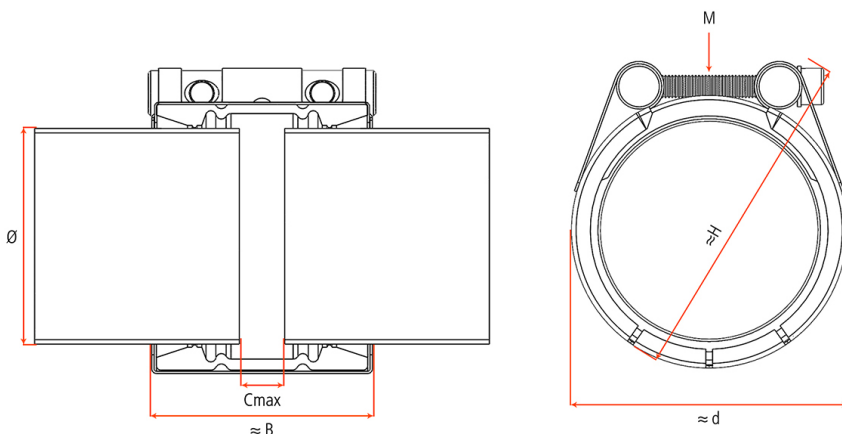

Important information:

- Follow the installation and disassembly instructions.
- PN = Working pressure with consideration of the application loads for industrial applications. In case of shipbuilding applications, PN is one PN class below, e.g. PN 25 Industry = PN 16 Shipbuilding.
- PN classes = PN 2.5; PN 6; PN 10; PN 16; PN 25
- Test pressure = PN x 1.5
- The pressure data is given under the precondition that radially rigid steel pipes with a minimum wall thickness are used under static load.
- Use the Technical Manual for other pipe materials.
- Band inserts are necessary for special applications.
- Support sleeves must be used for thermoplastic plastic pipes (PE/PP/PB/PVC/ABS...).