

PipeGrip ø 21 bis 516 mm / von 600 psig bis 90 psig (EPDM)

Order number: DO-GS16A4E21-24



Diameter range:	<= 172 mm, > 172 mm
Pipe materials:	Metal pipes - Metal pipes Drinking water / wastewater / air / compressed air (oil-free) / solids
Flowing medium:	-30 °C up to 125 °C EPDM HT (peroxyd)
Pressure levels:	PN 25
High tension-proof / Not tension-proof:	High tension-proof


Application temperature: -30°C bis +125°C

Maximum diameter difference: bis 1 mm

Tender text:

PipeGrip 600 psig TENSION-PROOF with EPDM Sealing -30°C up to +125°C in A4 (316/1.4571) Quality Ø min./max. 21-23 mm Width 45 mm 1 Closure Country of origin: NL TARIC: 73072980 weigth: 0,3 kg

OD Ø min. / max.	21 / 23 mm
≈ B	45 mm
Cmax	10 mm
≈ d	46 mm
≈ H	76 mm
M	M6
Gewicht	0.3 kg
≈ Volumen	1 dm ³

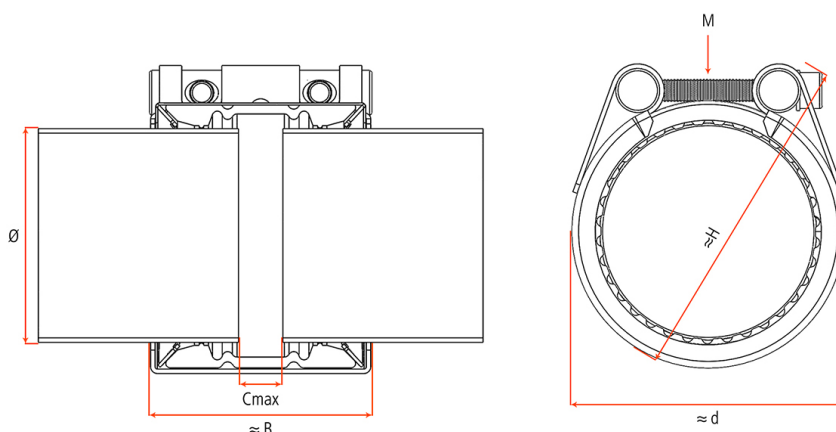

Important information:

- Follow the installation and disassembly instructions.
- PN = Working pressure with consideration of the application loads for industrial applications. In case of shipbuilding applications, PN is one PN class below, e.g. PN 25 Industry = PN 16 Shipbuilding.
- PN classes = PN 2.5; PN 6; PN 10; PN 16; PN 25
- Test pressure = PN x 1.5
- The pressure data is given under the precondition that radially rigid steel pipes with a minimum wall thickness are used under static load.
- Use the Technical Manual for other pipe materials.
- Band inserts are necessary for special applications.
- Support sleeves must be used for thermoplastic plastic pipes (PE/PP/PB/PVC/ABS...).