

## PEWOFLEX Ø 172-1370 mm / PN16 (EPDM) | 140 mm | 0172 / 185 mm

**Product number** 138-F10A4E172-185




|                                               |                                                                                                              |
|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| <b>Pressure levels</b>                        | PN 16                                                                                                        |
| <b>Pipe materials</b>                         | Metal pipes - Metal pipes                                                                                    |
| <b>Pipe materials</b>                         | Plastic pipes - Plastic pipes                                                                                |
| <b>Pipe materials</b>                         | Metal pipes - Plastic pipes                                                                                  |
| <b>High tension-proof / Not tension-proof</b> | Not tension-proof                                                                                            |
| <b>Diameter range</b>                         | > 172 mm                                                                                                     |
| <b>Pipe materials</b>                         | All pipe materials                                                                                           |
| <b>Flowing medium</b>                         | Drinking water / wastewater / air / compressed air (oil-free) / solids -30 °C up to 125 °C EPDM HT (peroxyd) |

**Application temperature:** -30°C up to +80°C

**Maximum diameter difference:** up to 3 mm

PEWOFLEX PN 16 NOT TENSION-PROOF with EPDM Sealing -30°C up to +80°C in A4 (316/1.4571) Quality Ø min./max. 172-185 mm Width 138 mm 1 Closure  
Country of origin: NL TARIC: 73072980 weighth: 4 kg

|                         |              |
|-------------------------|--------------|
| <b>OD Ø min. / max.</b> | 172 / 185 mm |
| <b>B</b>                | 138 mm       |
| <b>Cmax</b>             | 40 mm        |
| <b>d</b>                | 230 mm       |
| <b>H</b>                | 258 mm       |
| <b>M</b>                | M12          |
| <b>Weight</b>           | 4 kg         |

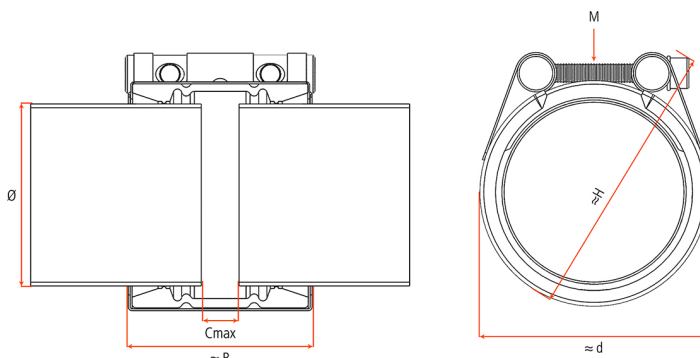

### Important information:

- Follow the installation and disassembly instructions.
- PN = Working pressure with consideration of the application loads for industrial applications. In case of shipbuilding applications, PN is one PN class below, e.g. PN 25 Industry = PN 16 Shipbuilding.
- PN classes = PN 2.5; PN 6; PN 10; PN 16; PN 25
- Test pressure = PN x 1.5
- The pressure data is given under the precondition that radially rigid steel pipes with a minimum wall thickness are used under static load.
- Use the Technical Manual for other pipe materials.
- Band inserts are necessary for special applications.
- Support sleeves must be used for thermoplastic plastic pipes (PE/PP/PB/PVC/ABS...).