

PEWOFLEX \varnothing 277-1471 mm / PN10 (NBR) | 140 mm | 0277 / 290 mm

Product number 138-F6A4N277-290




Pipe materials	Metal pipes - Metal pipes
Pipe materials	Plastic pipes - Plastic pipes
Pipe materials	Metal pipes - Plastic pipes
High tension-proof / Not tension-proof	Not tension-proof
Diameter range	> 172 mm
Pipe materials	All pipe materials
Flowing medium	Water / flammable gases / compressed air / oil / fuel and other hydrocarbons -30 °C bis +80 °C NBR
Pressure levels	PN 10

Application temperature: -20°C up to +80°C

Maximum diameter difference: up to 3 mm

PEWOFLEX PN 10 NOT TENSION-PROOF with NBR Sealing -20°C up to +80°C in A4 (316/1.4571) Quality \varnothing min./max. 277-290 mm Width 138 mm 1 Closure
Country of origin: NL TARIC: 73072980 weigh: 5 kg

OD \varnothing min. / max.	277 / 290 mm
B	138 mm
Cmax	40 mm
d	332 mm
H	360 mm
M	M12
Weight	5 kg

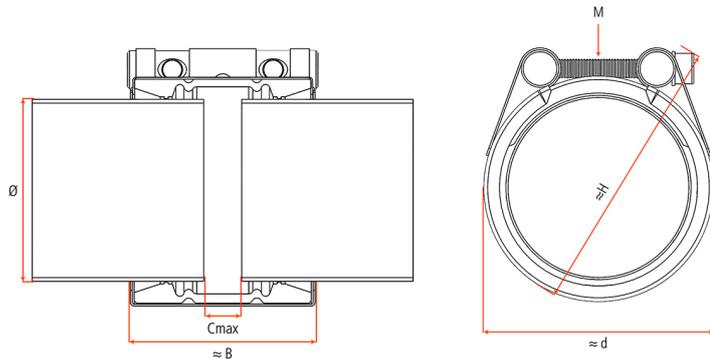

Important information:

- Follow the installation and disassembly instructions.
- PN = Working pressure with consideration of the application loads for industrial applications. In case of shipbuilding applications, PN is one PN class below, e.g. PN 25 Industry = PN 16 Shipbuilding.
- PN classes = PN 2.5; PN 6; PN 10; PN 16; PN 25
- Test pressure = PN x 1.5
- The pressure data is given under the precondition that radially rigid steel pipes with a minimum wall thickness are used under static load.
- Use the Technical Manual for other pipe materials.
- Band inserts are necessary for special applications.
- Support sleeves must be used for thermoplastic plastic pipes (PE/PP/PB/PVC/ABS...).