

PEWOCOMBIGRIP \varnothing 72-515 mm / PN10 (NBR) | 0072 / 80 mm | 095mm

Product number CGS10A4N72-80




Pipe materials	Metal pipes - Plastic pipes
Diameter range	> 172 mm
Flowing medium	Water / flammable gases / compressed air / oil / fuel and other hydrocarbons -30 °C bis +80 °C NBR
Pressure levels	PN 10
High tension-proof / Not tension-proof	High tension-proof

Application temperature: -20°C up to +80°C
Maximum diameter difference: up to 3 mm

PEWOCOMBIGRIP PN 10 TENSION-PROOF with NBR Sealing -20°C up to +80°C
 in A4 (316/1.4571) Quality \varnothing min./max. 72-80 mm Width 95 mm 1 Closure
 Country of origin: NL TARIC: 73072980 weighth: 1 kg

OD \varnothing min. / max.	72 / 80 mm
B	95 mm
Cmax	30 mm
d	108 mm
H	164 mm
M	M10
Weight	1 kg

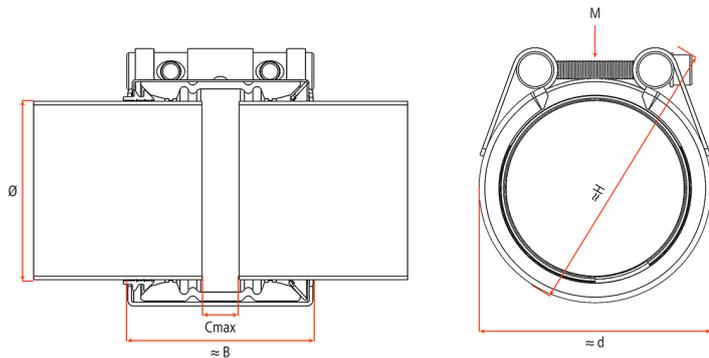

Important information:

- Follow the installation and disassembly instructions.
- PN = Working pressure with consideration of the application loads for industrial applications. In case of shipbuilding applications, PN is one PN class below, e.g. PN 25 Industry = PN 16 Shipbuilding.
- PN classes = PN 2.5; PN 6; PN 10; PN 16; PN 25
- Test pressure = PN x 1.5
- The pressure data is given under the precondition that radially rigid steel pipes with a minimum wall thickness are used under static load.
- Use the Technical Manual for other pipe materials.
- Band inserts are necessary for special applications.
- Support sleeves must be used for thermoplastic plastic pipes (PE/PP/PB/PVC/ABS...).