


PEWO-T-CLAMP-THREAD Ø 48-488 mm / PN16 (NBR) A2 | Connection piece with 1/2" Internal thread | 0048 / 55 mm

Product number 250H10T-0.50-16A2N48-55

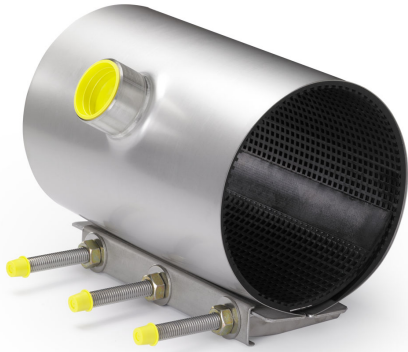

Flowing medium Water / flammable gases / compressed air / oil / fuel and other hydrocarbons -30 °C bis +80 °C NBR

Housing material Closure, Housing Material A2 (1.4301)

Application temperature: -20°C bis +70°C

PEWOTAP one-piece Tapping clamp with two locking screws per closure, pressure range: PN 16 width: 250 mm Ø min./max.: 48-55 Stainless Steel Quality: Closure, Housing Material A2 (1.4301) Connection piece with 2" Internal thread Waffle structure seal NBR sulfur cured temperature range: -20°C up to +70°C Country of origin: EU TARIC: 73072980

OD Ø min. / max. 48-55 mm

B 250 mm

Cmax 10 mm

M M12