

PipeGrip ø 21 bis 516 mm / von 600 psig bis 90 psig (EPDM) | 045mm | 0021 / 23 mm

Product number DO-GS16A4E21-24




Pipe materials	Metal pipes - Metal pipes
Diameter range	> 172 mm
High tension-proof / Not tension-proof	High tension-proof
Pressure levels	PN 25
Flowing medium	Drinking water / wastewater / air / compressed air (oil-free) / solids -30 °C up to 125 °C EPDM HT (peroxyd)

Application temperature: -30°C up to +125°C

Maximum diameter difference: up to 1 mm

PipeGrip 600 psig Axially tensile with EPDM Sealing -30°C up to +125°C in A4
(316/1.4571) Ø min./max. 21-23 mm Width 45 mm 1 Closure, Country of Origin:
EU Customs tariff number: 73072980 Weight: 0,3 kg

OD Ø min. / max.	21 / 23 mm
B	45 mm
Cmax	10 mm
d	46 mm
H	76 mm
M	M6
Weight	0.3 kg

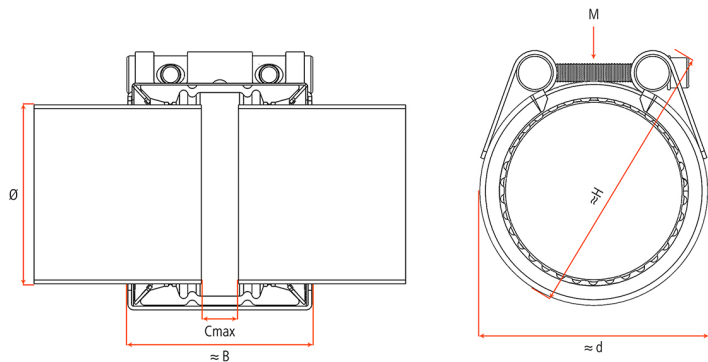

Important information:

- Follow the installation and disassembly instructions.
- PN = Working pressure with consideration of the application loads for industrial applications. In case of shipbuilding applications, PN is one PN class below, e.g. PN 25 Industry = PN 16 Shipbuilding.
- PN classes = PN 2.5; PN 6; PN 10; PN 16; PN 25
- Test pressure = PN x 1.5
- The pressure data is given under the precondition that radially rigid steel pipes with a minimum wall thickness are used under static load.
- Use the Technical Manual for other pipe materials.
- Band inserts are necessary for special applications.
- Support sleeves must be used for thermoplastic plastic pipes (PE/PP/PB/PVC/ABS...).