


PEWOTAPE AS40 PLUS | 0030 mm | Gelb

Product number 30-15-TAPE-AS40-Y

3-layer corrosion protection system DVGW according to DIN 30672/EN 12068
B50/C50 to 85° C Yellow

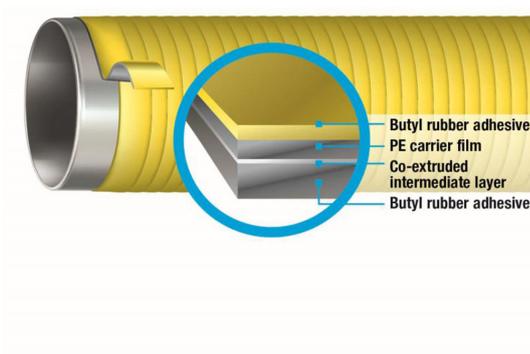

Weight 0.52 kg

3-layer corrosion protection system DVGW according to DIN 30672/EN 12068 B50/C50 up to 85°C.

Available in black and yellow.

L = 15 m

T = 0.80 mm

Special advantages:

- Genuine co-extruded three-layer tape.
- Proven corrosion protection technology for over 40 years.
- Easy processing thanks to the flexible and highly tear-resistant carrier film.
- DIN-DVGW approved system: B 50 and C 50 (EN 12068, DIN 30672).
- Compatible with factory coatings made of PE, PP, FBE, PU, CTE and Bitumen.
- For temperatures up to +85°C.

PEWOTAPE-AS40 Plus is a cold-applied sealing tape system for the corrosion protection of metal pipes and pipelines in high mechanical and corrosive stress classes.

With its outstanding properties, PEWOTAPE-AS40 Plus has been the proven corrosion protection technology for cold-applied corrosion protection tapes worldwide since 1972. Thanks to its innovative formula, the tapes bond completely in the overlap area, forming a durable, tubular coating.

PEWOTAPE-AS40 Plus is a DIN-DVGW-approved system and can be applied in 3 layers (B 50) or 4 layers (C 50), depending on the desired protection class.

Standards reference (4-ply):

(Reg.No.:NV5180AL0188)

- EN 12068 - C 50
- DIN 30672 - C 50



Standard reference (3-ply):
(Reg.No.:NV5180AR0756)

- EN 12068 - B 50
- DIN 30672 - B 50

PEWOTAPE-AS40 Plus is virtually impermeable to water vapor and oxygen and is resistant to soil bacteria and electrolytes.

PEWOTAPE-AS40 Plus is compatible with factory coverings made of PE, PP, FBE, PU, CTE, and Bitumen.

The PEWOTAPE-AS40 Plus system consists of:

PEWOBAR-HT Primer

A solvent-based primer according to EN 12068 and DIN 30672 for corrosion protection with PEWOBAR tapes. See the separate product information for PEWOBAR-HT.

PEWOTAPE-AS40 Plus

A genuine co-extruded 3-layer plastic tape made of stabilized polyethylene carrier material with butyl rubber adhesive on both sides.

PEWOTAPE-AS40 Plus has a thickness of ≥ 0.8 mm.