


PEWOTAPE R20 HT | 0050 mm

Product number 50-30-TAPE-R20HT-B

2-layer corrosion protection system DVGW according to DIN 30672/EN 12068
B70 up to 100° C Black

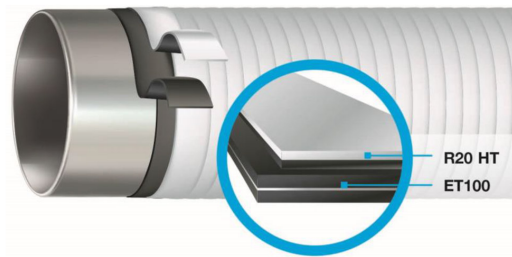

Weight 0.92 kg

"

2-layer corrosion protection system DVGW according to DIN 30672/EN 12068 B70 up to 100°C Black.

Length = 30 m

Width = 0.5 mm

R20 HT special advantages:

- Excellent corrosion protection for pipelines with increased temperature loads.
- Particularly thick and flexible inner layer made of 1.0 mm thick butyl rubber tape.
- Exceeds the requirements of load class B 70 according to EN 12068.
- Enagá/Spain approved system: B 70 (EN 12068, DIN 30672).
- Compatible with factory coatings made of PE, PP, FBE, PU, CTE and bitumen.
- For temperatures up to +100°C.