

**PEWOREP ø 264-1471 mm / PN10 (EPDM) | 210mm | 0348 / 374 mm**

**Product number** 208-2R6A4E348-374




|                                               |                                                                                                              |
|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| <b>High tension-proof / Not tension-proof</b> | Not tension-proof                                                                                            |
| <b>Diameter range</b>                         | > 172 mm                                                                                                     |
| <b>Pipe materials</b>                         | All pipe materials                                                                                           |
| <b>Pressure levels</b>                        | PN 10                                                                                                        |
| <b>Housing material</b>                       | Closure, Housing Material A4 (1.4571 / 1.4404)                                                               |
| <b>Flowing medium</b>                         | Drinking water / wastewater / air / compressed air (oil-free) / solids -30 °C up to 125 °C EPDM HT (peroxyd) |

**Application temperature:** -30°C bis +80°C

**Maximum diameter difference:** bis 3 mm

PEWOREP PN 10 NOT TENSION-PROOF with EPDM Sealing -30°C up to +80°C in A4 (316/1.4571) Quality Ø min./max. 348-374 mm Width 208 mm 2 Closure / Country of origin: NL TARIC: 73072980 weigh: 11 kg

|                         |                     |
|-------------------------|---------------------|
| <b>OD Ø min. / max.</b> | <b>348 / 374 mm</b> |
| <b>B</b>                | <b>208 mm</b>       |
| <b>Cmax</b>             | <b>80 mm</b>        |
| <b>d</b>                | <b>431 mm</b>       |
| <b>H</b>                | <b>464 mm</b>       |
| <b>M</b>                | <b>M16</b>          |
| <b>Weight</b>           | <b>11 kg</b>        |

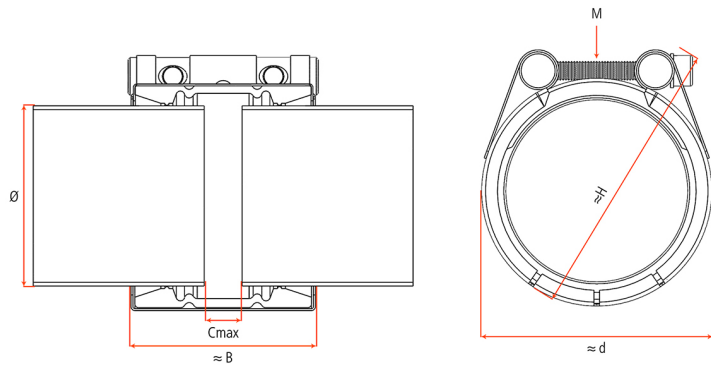

**Important information:**

- Follow the installation and disassembly instructions.
- PN = Working pressure with consideration of the application loads for industrial applications. In case of shipbuilding applications, PN is one PN class below, e.g. PN 25 Industry = PN 16 Shipbuilding.
- PN classes = PN 2.5; PN 6; PN 10; PN 16; PN 25
- Test pressure = PN x 1.5
- The pressure data is given under the precondition that radially rigid steel pipes with a minimum wall thickness are used under static load.
- Use the Technical Manual for other pipe materials.
- Band inserts are necessary for special applications.
- Support sleeves must be used for thermoplastic plastic pipes (PE/PP/PB/PVC/ABS...).