

PEWOG RIP Ø 64-374 mm / PN16 (FKM) | 140 mm | 0210 / 223 mm

Product number 142-G10A4F210-223




Pressure levels	PN 16
Pipe materials	Metal pipes - Metal pipes
Diameter range	> 172 mm
High tension-proof / Not tension-proof	High tension-proof
Flowing medium	Mineral oils / aliphatic / aromatic hydrocarbons / chlorinated hydrocarbons / concentrated and diluted acids, weak alkalis -20 °C bis 200 °C FKM / VITON®

Application temperature: -20°C up to +200°C

Maximum diameter difference: up to 3 mm

PEWOG RIP PN 16 TENSION-PROOF with FKM Sealing -20°C up to +200°C in A4 (316/1.4571) Quality Ø min./max. 210-223 mm Width 142 mm 1 Closure
Country of origin: NL TARIC: 73072980 weight: 6,5 kg

OD Ø min. / max.	210 / 223 mm
B	142 mm
Cmax	40 mm
d	261 mm
H	287 mm
M	M16
Weight	6.5 kg

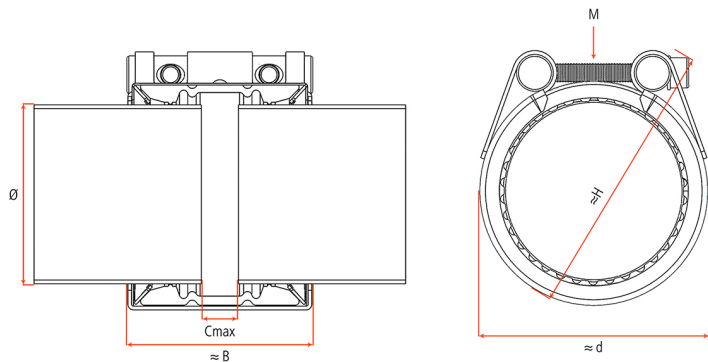

Important information:

- Follow the installation and disassembly instructions.
- PN = Working pressure with consideration of the application loads for industrial applications. In case of shipbuilding applications, PN is one PN class below, e.g. PN 25 Industry = PN 16 Shipbuilding.
- PN classes = PN 2.5; PN 6; PN 10; PN 16; PN 25
- Test pressure = PN x 1.5
- The pressure data is given under the precondition that radially rigid steel pipes with a minimum wall thickness are used under static load.
- Use the Technical Manual for other pipe materials.
- Band inserts are necessary for special applications.
- Support sleeves must be used for thermoplastic plastic pipes (PE/PP/PB/PVC/ABS...).