

PEWOG RIP \varnothing 64-374 mm / PN16 (EPDM) | 095mm | 0064 / 72 mm

Product number GS10A4E64-72




Pressure levels	PN 16
Pipe materials	Metal pipes - Metal pipes
Diameter range	> 172 mm
High tension-proof / Not tension-proof	High tension-proof
Flowing medium	Drinking water / wastewater / air / compressed air (oil-free) / solids -30 °C up to 125 °C EPDM HT (peroxyd)

Application temperature: -30°C up to +125°C

Maximum diameter difference: up to 3 mm

PEWOG RIP PN 16 TENSION-PROOF with EPDM Sealing -30°C up to +125°C in A4 (316/1.4571) Quality \varnothing min./max. 64-72 mm Width 95 mm 1 Closure Country of origin: NL TARIC: 73072980 weight: 1 kg

OD \varnothing min. / max.	64 / 72 mm
B	95 mm
Cmax	30 mm
d	108 mm
H	164 mm
M	M10
Weight	1 kg

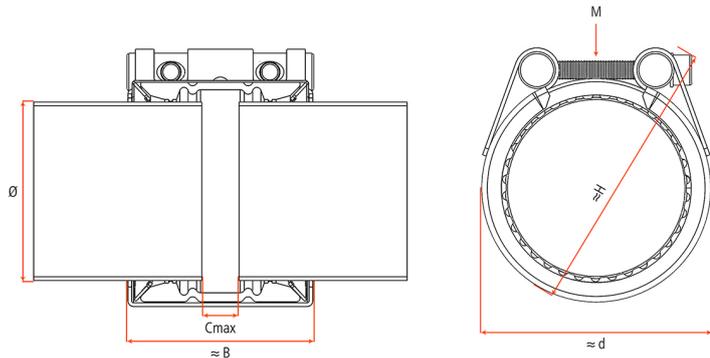

Important information:

- Follow the installation and disassembly instructions.
- PN = Working pressure with consideration of the application loads for industrial applications. In case of shipbuilding applications, PN is one PN class below, e.g. PN 25 Industry = PN 16 Shipbuilding.
- PN classes = PN 2.5; PN 6; PN 10; PN 16; PN 25
- Test pressure = PN x 1.5
- The pressure data is given under the precondition that radially rigid steel pipes with a minimum wall thickness are used under static load.
- Use the Technical Manual for other pipe materials.
- Band inserts are necessary for special applications.
- Support sleeves must be used for thermoplastic plastic pipes (PE/PP/PB/PVC/ABS...).